


CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.
THE COGNIZANT ACTIVITY CAGE CODE IS 040L3.

REVISIONS				
SYMB	DESCRIPTION	BY	DATE	APPROVED
C	REPLACES REV B WITH CHANGE SEE NOR 89B0100.11		90/2/22	S/LWF
D	SEE NOR 91B0023.2		91/5/2	S/HRJ
E	SEE NOR 95BB072.10		95/9/18	S/HRJ
F	(1-8) SEE NWS EARLE ECP 196165		96/11/27	S/RS
G	(1-19) SEE NSWC IHD ECP I02014		02/5/9	S/RS
H	(1-3) SEE NSWC IHD ECP I02056		02/8/26	S/RS

NOTES:

- (G12) 1. CONTAINER DATA:
 - a. BOX, FIND NO. 1, SHALL BE FABRICATED IN ACCORDANCE WITH ASTM D5118/D5118M, STYLE RSC, TYPE CF, CLASS WEATHER-RESISTANT, VARIETY SW, GRADE W5C.
- (F1) 2. PACKING DATA:
 - a. INSERT (6) LONG PARTITIONS, FIND NO. 2 AND (8) SHORT PARTITIONS FIND NO. 3 INTO BOX FIND NO. 1, THEN PLACE TWELVE ADAPTERS, SPOTTING CHARGE, BOMB MK 89 MOD 0 IN A THREE (3) BY FOUR (4) PATTERN IN BOX FIND NO. 1.
 - (M101) b. CLOSE TOP AND BOTTOM OF BOX. APPLY TAPE, FIND NO. 6, OVER THE CENTER SEAMS OF BOX. CONTINUE TAPE 2 INCHES ONTO THE BOX ENDS IN ACCORDANCE WITH ASTM D1974.
 - (M102) c. POSITION TAMPER RESISTANT TAPE, FIND NO. 7, OVER TAPE, FIND NO. 6, SO THAT THE TAMPER RESISTANT TAPE SPANS THE OUTER EDGE OF CLOSURE FLAPS AND EXTENDS ONTO THE END OF BOX. TAMPER RESISTANT TAPE FIND NO. 7, SHALL BE MARKED "US" FOR PRIVATE CONTRACTORS AND WITH AGENCY IDENTIFICATION FOR GOVERNMENT ACTIVITIES.
 - (H1) (M104) d. TAPE GUMMED, FIND NO. 7 SHALL BE A SECURITY TAMPER RESISTANT TAPE, SUCH THAT IN THE EVENT THE BOX IS OPENED IT WILL BE EVIDENT THE TAPE WAS EITHER REMOVED OR REPLACED. THE WORDING SUCH AS "OPENED" SHALL APPEAR ON THE TAPE ONCE IT HAS BEEN PEELED AWAY FROM THE BOX.
- (M103) 3. MARKINGS:
 - (G14) a. CONTAINER SHALL BE MARKED AND LABELED AS DESCRIBED. MARKINGS SHALL BE .12 INCH HIGH MINIMUM CHARACTERS IN APPROXIMATE LOCATION SHOWN, USING INK FIND NO. 8 IN A CONTRASTING COLOR.
 - b. MARK CONTAINER WITH NALC AND LOT NUMBER OF CONTENTS. HANDWRITTEN DATA PERMISSIBLE FOR LOT NUMBER ONLY.
 - c. APPLY THE FOLLOWING BAR CODES IN ACCORDANCE WITH 19200-12982865. NATIONAL ITEM IDENTIFICATION NUMBER (NIIN) LOT NUMBER AND QUANTITY
 - d. MARK CONTAINER WITH CONTRACTOR NAME OR CAGE AND CONTRACT NO.
- (G15) 4. INSIDE BOX DIMENSIONS 18.44 LONG, 13.88 WIDE, 9.38 DEEP.
- (G16) (F2) 5.
- (F19) 6. ON DRAWING 19200-12982998, DISREGARD NOTE 7 INSTRUCTIONS.

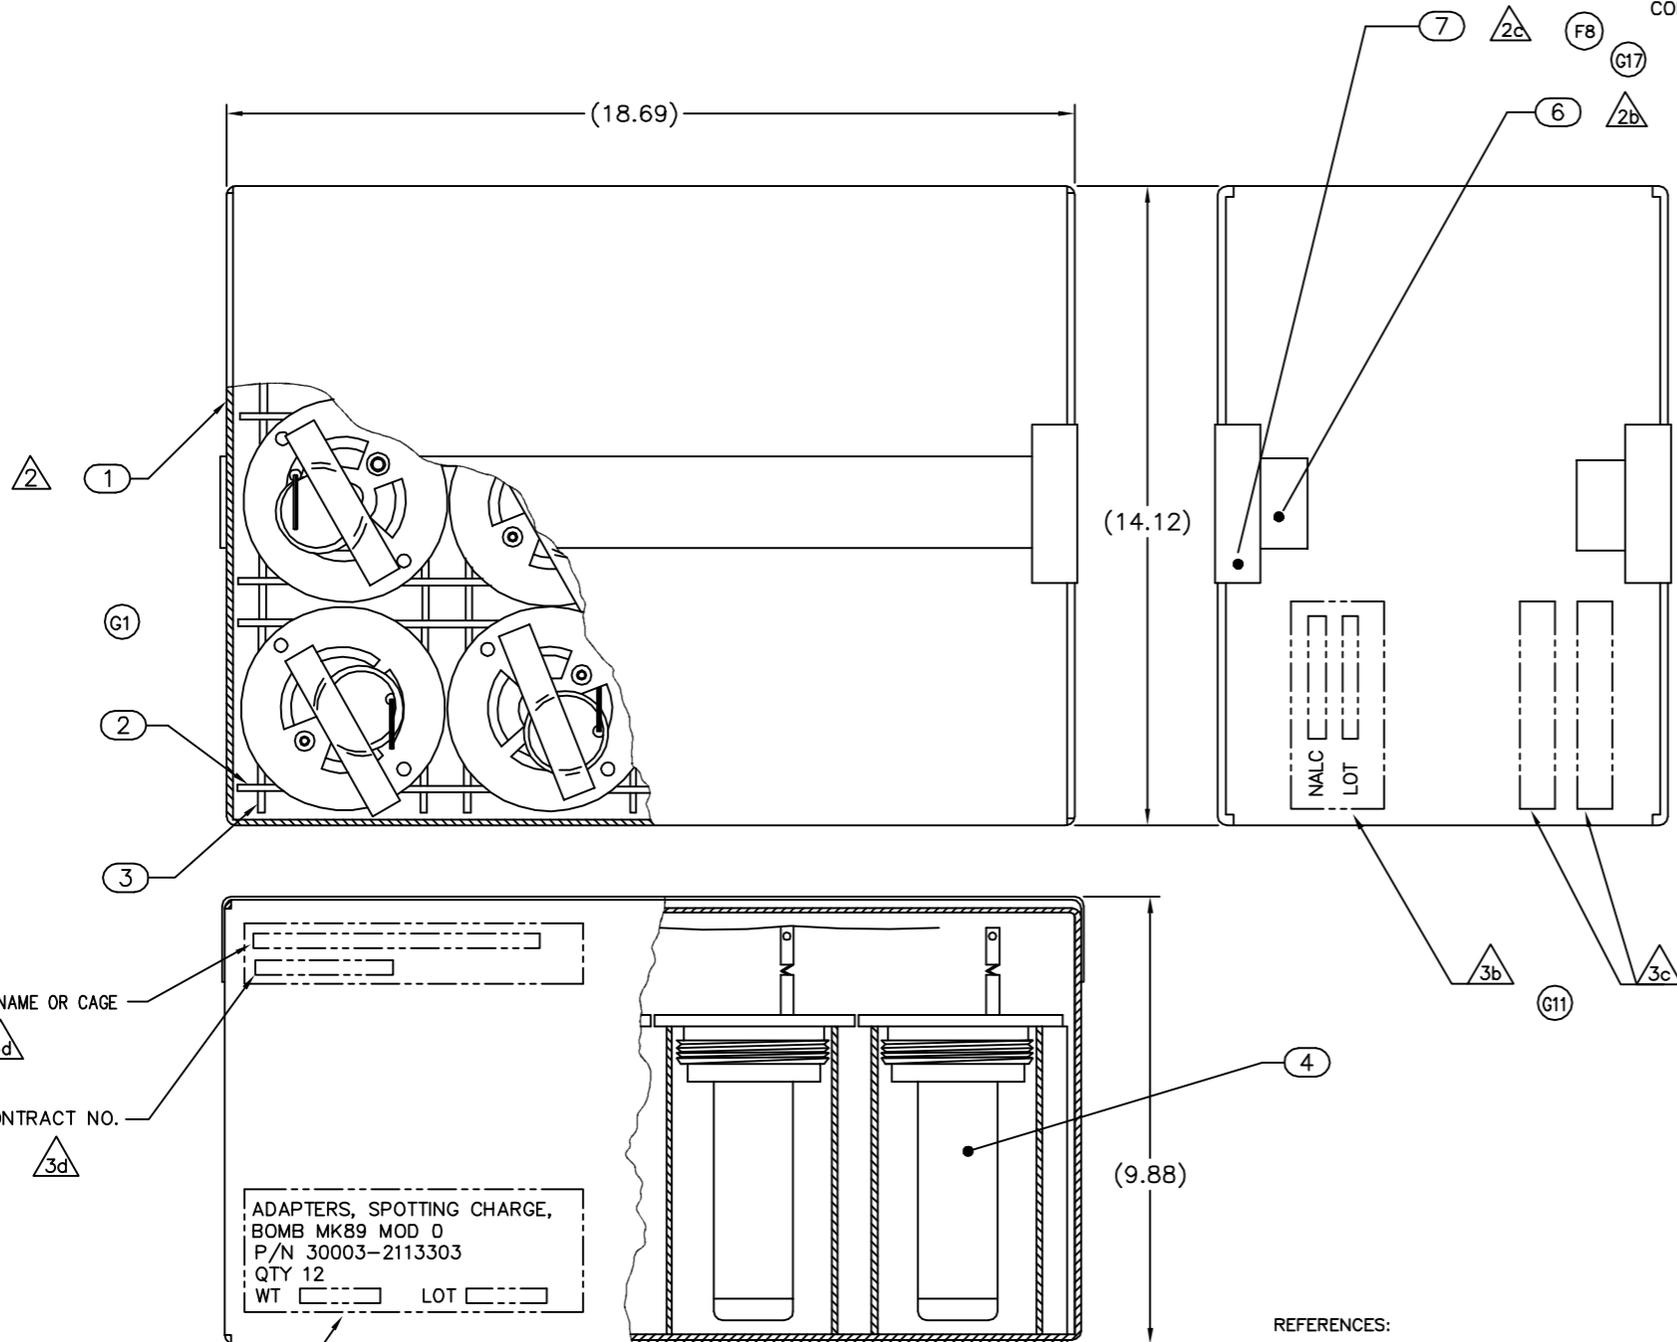

REFERENCES:

- WEIGHTS
- 1. CONTAINER AND PARTITIONS-----3.85 LBS (CALC)
 - 12 KITS AT 1.12 LB EACH-----13.44 LBS (CALC)
 - GROSSWEIGHT 17.29 LBS (CALC)
- (G5) 2. CUBAGE-----1.5 CU FT (CALC)

QTY REQD	NOMENCLATURE OR DESCRIPTION	CAGE CODE NO.	PART OR IDENTIFYING NO.	SPECIFICATION	FIND NO.
	AR INK, STENCIL		TYPE II OR III	A-A-208	8
4	ALT TAPE GUMMED	19200	TYPE 1, CL 2, 3 IN WIDE	A-A-1671	7
	4 TAPE, TAMPER RESISTANT	19200	12982998		
	AR PRESSURE SENSITIVE TAPE FOR PACKAGING, FILAMENT REINFORCED		TYPE II OR III 2 IN. WIDE	ASTM D5330 / D5330M	6
	12 ADAPTER, SPOTTING CHARGE, BOMB MK 89 MOD 0		2113303		4
	8 SHORT PARTITION		2113262		3
	6 LONG PARTITION		2113263		2
	1 BOX, FIBERBOARD			ASTM D5118 / D5118M	1

CLASSIFICATION OF CHARACTERISTICS (DOD-STD-2101)

CRITICAL - NONE
MAJOR 4 (G4) (H3)
MINOR - NONE ANNOTATED

DISTRIBUTION STATEMENT D. DISTRIBUTION AUTHORIZED TO THE DOD AND DOD CONTRACTORS ONLY BECAUSE EXPORT OF THE DATA IS RESTRICTED (DETERMINATION 22 FEB 90). OTHER REQUESTS SHALL BE REFERRED TO NAVAL AIR WARFARE CENTER WEAPONS DIVISION (332200E), POINT MUGU, CA 93042.

WARNING - THIS DOCUMENT CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ) OR THE EXPORT ADMINISTRATION ACT OF 1979, AS AMENDED (TITLE 50, U.S.C., APP 2401 ET SEQ). VIOLATIONS OF THESE EXPORT LAWS ARE SUBJECT TO SEVERE CRIMINAL PENALTIES. DISSEMINATE IN ACCORDANCE WITH PROVISIONS OF DOD DIRECTIVE 5230.25.

DESTRUCTION NOTICE - WHEN THIS DATA IS NO LONGER NEEDED, DESTROY IT BY ANY MEANS WHICH WILL PREVENT DISCLOSURE OF CONTENTS OR RECONSTRUCTION OF THE DOCUMENT.

ADL2127862		
NEXT ASSY	LISTED ON	USED ON
APPLICATION		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ANGLES ± .XX DECIMALS ± .03 .XXX DECIMALS ± PART SHALL BE FREE OF BURRS BROKEN EDGES — MAX FILLETS — R MAX SURFACE ROUGHNESS ✓
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.100M, ASME 14.24, ASME Y14.35M, ASME Y14.34M
DO NOT SCALE THIS DRAWING

PACIFIC MISSILE TEST CENTER POINT MUGU, CA 93042
PE 900326
CM 900302
CHECKED 900222
CHECKED 2/14/90
DRAWN CSA 2/12/90
APPROVED FOR NAVAIRSYSCOM 900222
BY DIRECTION

DEPARTMENT OF THE NAVY NAVAL AIR SYSTEMS COMMAND WASHINGTON, D.C. 20360
PACK, SHIPPING AND STORAGE (FOR 12 ADAPTERS, SPOTTING CHARGE, BOMB MK 89 MOD 0)
SIZE CAGE CODE DRAWING NO. REV
D 30003 2127862 H
SCALE 1/2 UNIT WT SHEET 1 OF 1